

CultureIN

Responsible and sustainable design of
living and working spaces.



WALL SLABS

TECHNICAL SHEET

WALL SLABS

The acoustic or luminous hexagonal slabs are created from a textile material made of Varian® : a hybrid and biosourced material made of flax fibre.

Manufactured in France by the company CULTURE IN, the Varian® wall elements are eco-designed, without VOC emissions, ensuring optimal air quality. The Varian® meets the requirements of the BREEAM and LEED standards.


Varian® acoustic solutions are available without fire treatment for the smallest possible ecological footprint, or with fire treatment to meet fire standards.

Ideal for interior space planning, our slabs have been designed for wall and ceiling cladding. With an acoustic filter or backlighting, they can be used to improve sound comfort as well as to create a soft, uncluttered atmosphere.



WALL SLABS


TECHNICAL CHARACTERISTICS

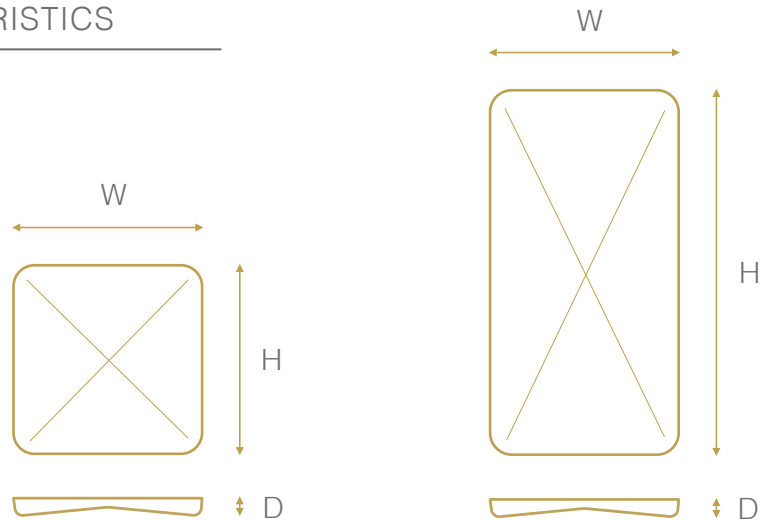

Square slab

Rectangular slab

Dimension	Size M	Size L	Size M	Size L
Width (mm)	360	720	360	360
Height (mm)	360	720	720	1080
Depth (mm)	45	45	45	45
Weight (kg)	1	2	2,1	3,1
Reference	1PADC001	1PADC002	1PADR001	1PADR002
Light option	1PADC001D	1PADC002D	1PADR001D	1PADR002D

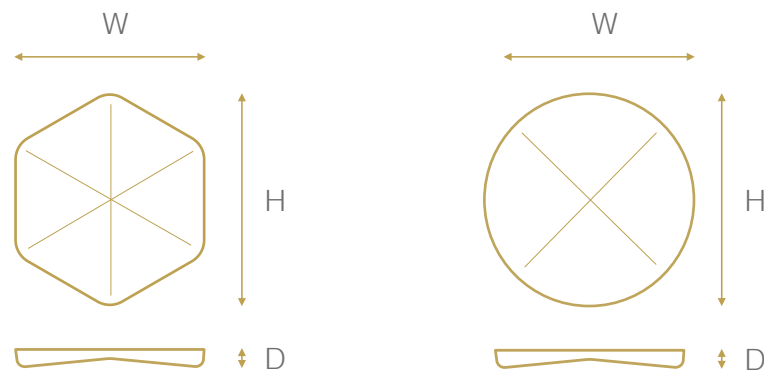

Hexagonal slab

Round slab



Dimension	Size S	Size M	Size L	Size S	Size M	Size L
Width (mm)	240	384	624	Ø 300	Ø450	Ø600
Height (mm)	265	431	708	-	-	-
Depth (mm)	45	45	45	30	30	30
Weight (kg)	0,4	1	2,7	0,4	1	2,45
Reference	1PADH001	1PADH002	1PADH003	1PADD001	1PADD002	1PADD003
Light option		1PADH002D	1PADH003D	1PADD001D	1PADD002D	1PADD003D

These dimensions are given as an indication, do not hesitate to consult our design office for other dimensions. Various shaping possibilities, please consult us.

WALL SLABS


ATTACHMENT SYSTEM

Standard screw into wall

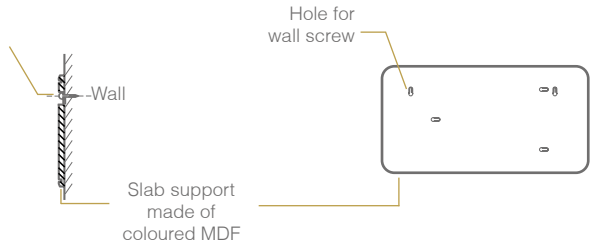


Options de fixation : aimant, velcro


CONSTRUCTIVE PRINCIPALE

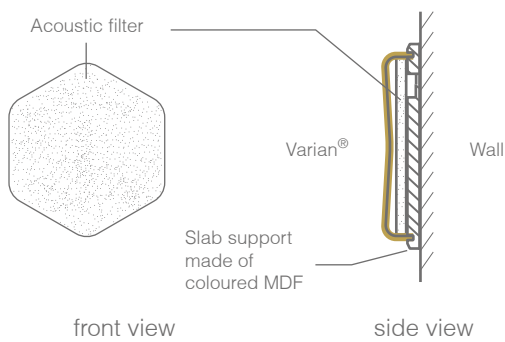

BACKLIGHTING OPTION

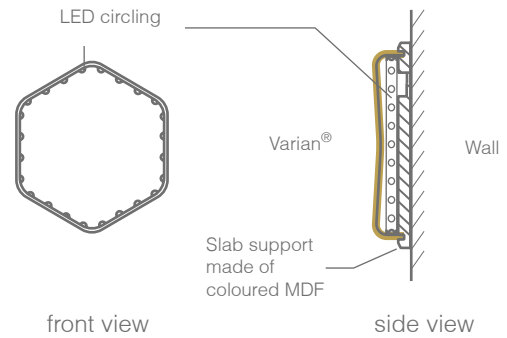

ACOUSTIC PERFORMANCE

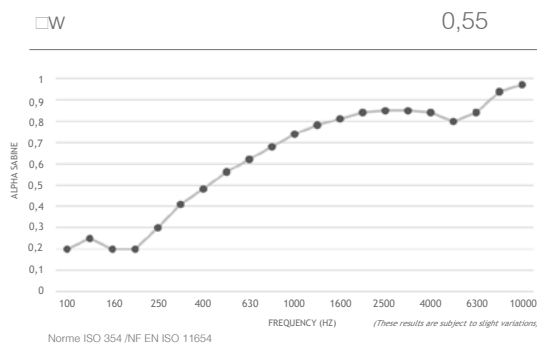

Light feedback by diffuser

Voltage (v)	24
Temperature (K)	3000
Intensity (lumen)	1100/m
Power (w)	9,6/m
IRC (%)	90
Number of LEDs (/ml)	140
Guarantee	2 ans